

## P8400GMA

48VDC, 4 port Industrial Gigabit PoE+ to Fiber Switch, 4x10/100/1000BaseT(X) PSE (802.3af/at PoE+), 1x100/1000M TX/SFP combo, 1x100/1000M SFP, -40 to 75°C operating temperature

### Introduction

P8400GMA is a new generation of Gigabit unmanaged POE+ to Fiber switch introduced by SONGXIN. In addition to the first generation of original functions, this version has improved the lightning strike protection level, which has 4 x 10 /100/1000BaseT(X) 802.3af/at (PoE) Ethernet port and 1 combo Gigabit Ethernet port and SFP fiber port. Each PoE port of the P8400GMA can provide up to 30 watts of power and can be powered to PD devices (such as IP cameras, access control systems, IP phones, wireless APs, etc.), which is beneficial for users to install



### Features

- Auto-MDI/MDIX on copper port
- 4xGbE PoE + 1xGbE SFP + 1xGbE RJ45/SFP Combo
- 30W IEEE802.3at compliant
- Each PoE port can be manually set for On-Off control
- 12KV surge protection on each PoE port
- -40°C~75°C operating temperature
- Redundant power input (48-56VDC) & Reverse power protection


### Specifications

Operating Mode	Layer 2
Total Gigabit Ports	7
Gigabit PoE Ports	4
Gigabit TX Ports (RJ-45)	-
Gigabit Combo (RJ-45/SFP)	1
Gigabit SFP slots	1
Protocols & Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE802.3x traffic and back pressure, IEEE802.3af for POE Ethernet power supply IEEE802.3at for POE+ Ethernet power supply
Switching Capacity (Gbps)	16Gbps
Forwarding Capacity (Mpps)	11.904Mpps
Jumbo Frame(byte)	10K
MAC Table	1K
Network Connection	Auto-MDI/MDI-X & Auto-Negotiation Full/Half duplex
Operating Mode	Store and forward


PoE Power	PoE IEEE 802.3af (Max 15.4W) per port PoE+ IEEE802.3at (Max 30W) per port
Reverse Power Protection	Yes
Overload power protection	Yes
Total Power	120W
Surge Protection	12KV
Dimension (W x H x D)	160x32x155mm
Weight	TBC
Connectors	RJ45 x 5, SFP slot x 2, Terminal block x1
Accessories	Din rail mount kit
LED Indicators	Power 、Fiber 、Link(Act)
Fan-less Design	Yes IEEE 802.3az Energy Efficient Ethernet (EEE)
Operating Temperature	-40°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Operating Humidity	5% ~ 95% (Non-Condensing)
Storage Humidity	5% ~ 90% (Non-Condensing)
MTBF(Hour)	>50,000
Certification Compliance	CE, FCC, VCCI, C-Tick
Safety	EN60950-1, IEC60950-1
EMC	EN61000-4-5

## Dimensions

Unit: mm

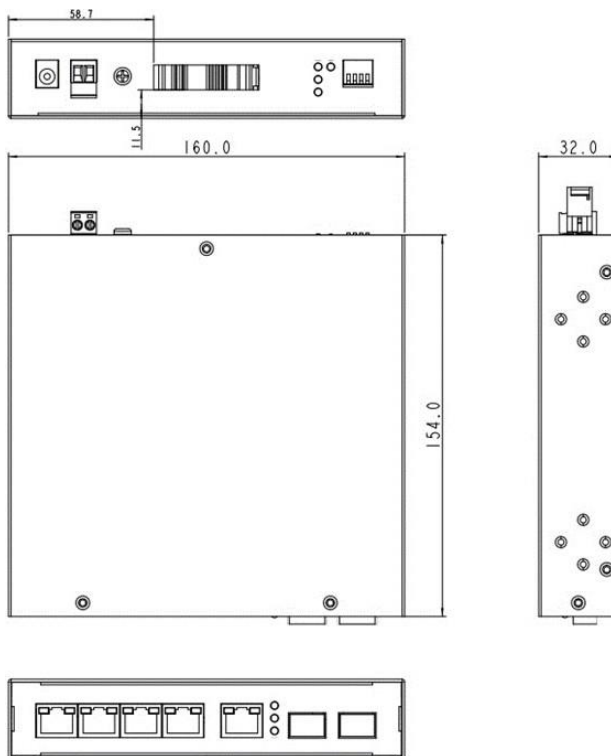

## Application

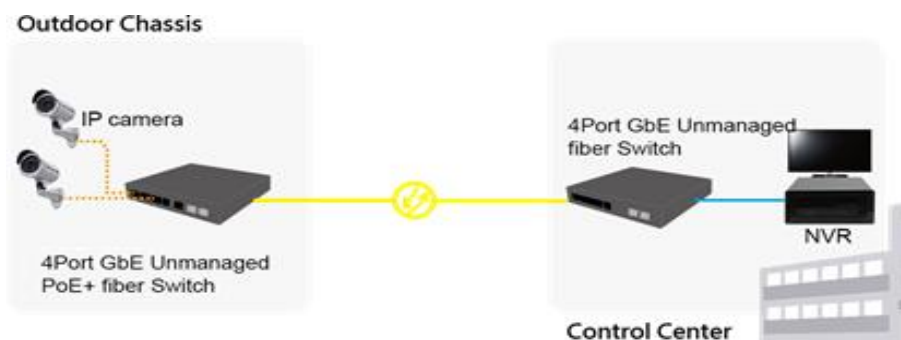

## Ordering Information

Model Name	Description
P8400GMA	48VDC, 4 port Industrial Gigabit PoE+ to Fiber Switch, 4x10/100/1000BaseT(X) PSE (802.3af/at PoE+), 1x100/1000M TX/SFP combo, 1x100/1000M SFP, -40 to 75°C operating temperature

## Accessories (sold separately)

Model Name	Description
SFP-GE-BX20-5531-I-GEN	SFP BIDI 1.25Gbps, TX1550nm/RX1310, SC, 20km, -40 to 85°C
SFP-GE-BX20-3155-I-GEN	SFP BIDI 1.25Gbps, TX1310nm/RX1550, SC, 20km, -40 to 85°C
SFP-GE-LX-I-GEN	SFP 1.25Gbps, 1310nm, LC, 20km, -40 to 85°C

## Power Supply (sold separately)

Model Name	Description
GM130-480025-F	AC-DC Industrial desktop adaptor with PFC/ Output 48Vdc at 2.5A

### For More Information:

SONGXIN TAIPEI TECH SOLUTIONS CO., LTD.

<https://songxin.en.taiwantrade.com/>

Email: [oversea@songxin.com.tw](mailto:oversea@songxin.com.tw)